


كلية المستقبل الجامعة

قسم هندسة تقنيات
الأجهزة الطبية




المحاضرة رقم / 7
مادة الميكانيك / المرحلة الأولى
م.م. ميس خالد محمد

TRUSS ANALYSIS


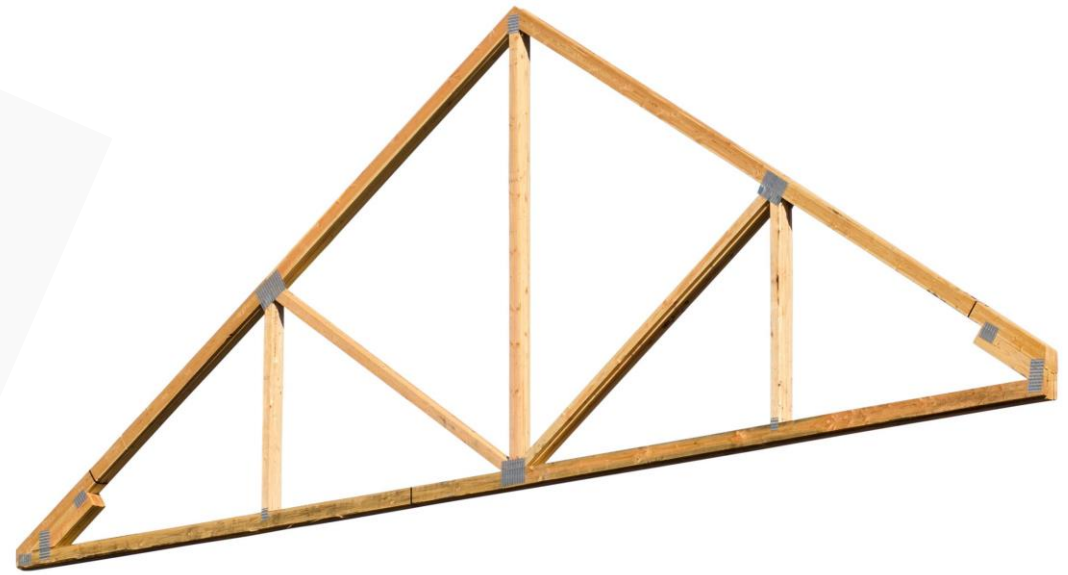


Introduction


- A truss is a structure that consists of members organized into connected triangles so that the overall assembly behaves as a single object. Trusses are most commonly used in bridges, roofs and towers.

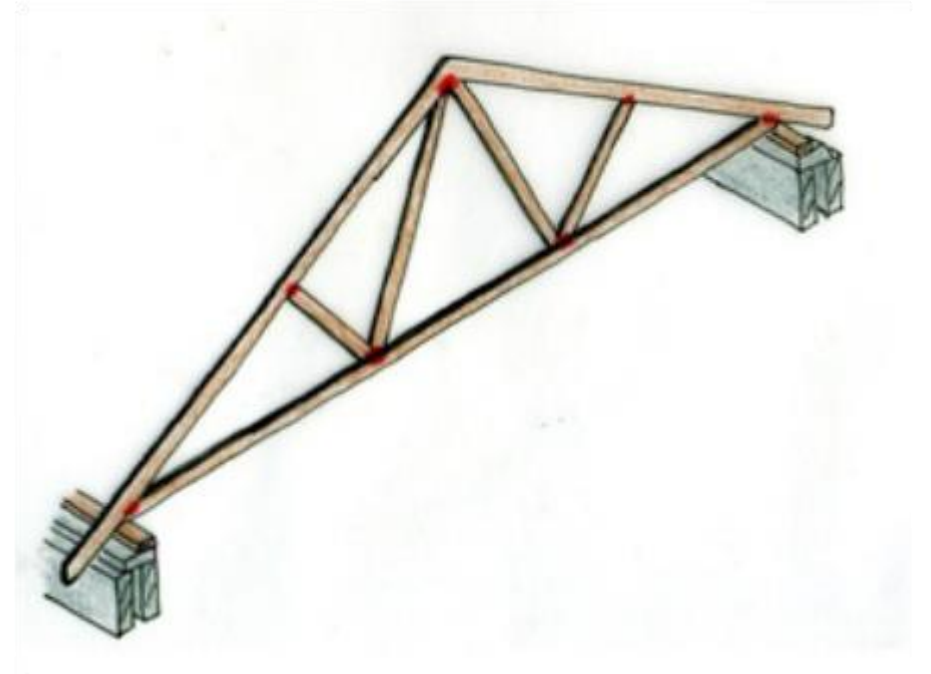

- A truss is made up of a web of **triangles** joined together to enable the even **distribution of weight and the handling of changing tension and compression without bending or shearing**. The triangle is **geometrically stable** when compared to a four (or more) -sided shape which requires that the corner joints are fixed to prevent shearing.

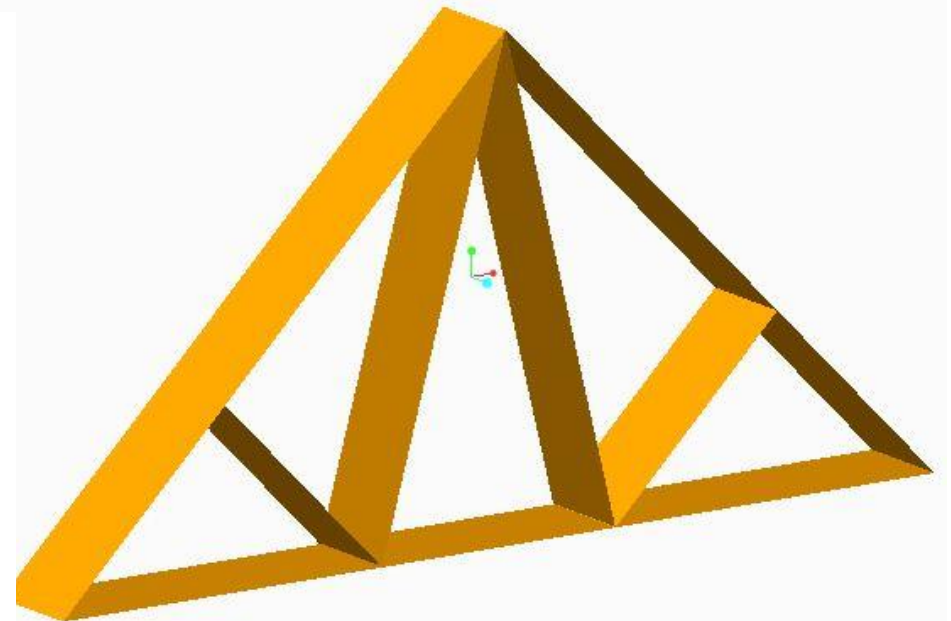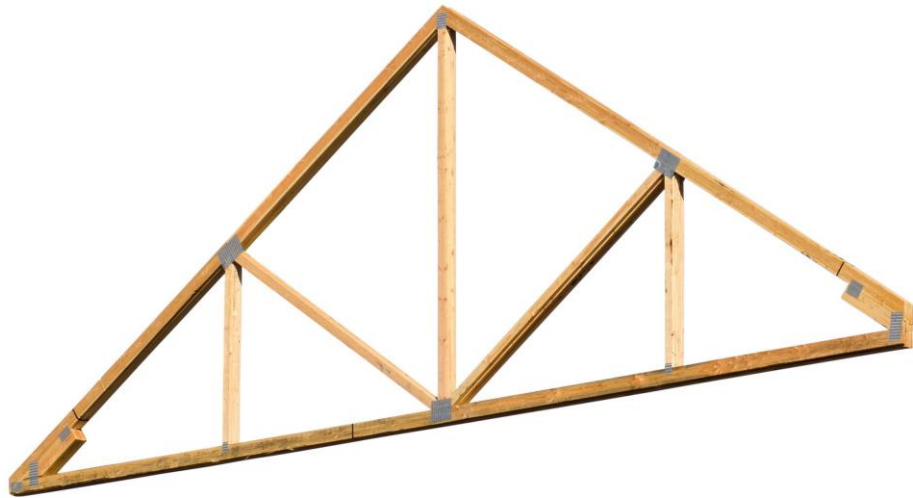

- Trusses consist of triangular units constructed with straight members. **The ends** of these members are **connected** at **joints**, known as nodes. They are able to carry significant loads, transferring them to supporting structures such as load-bearing beams, walls or the ground.

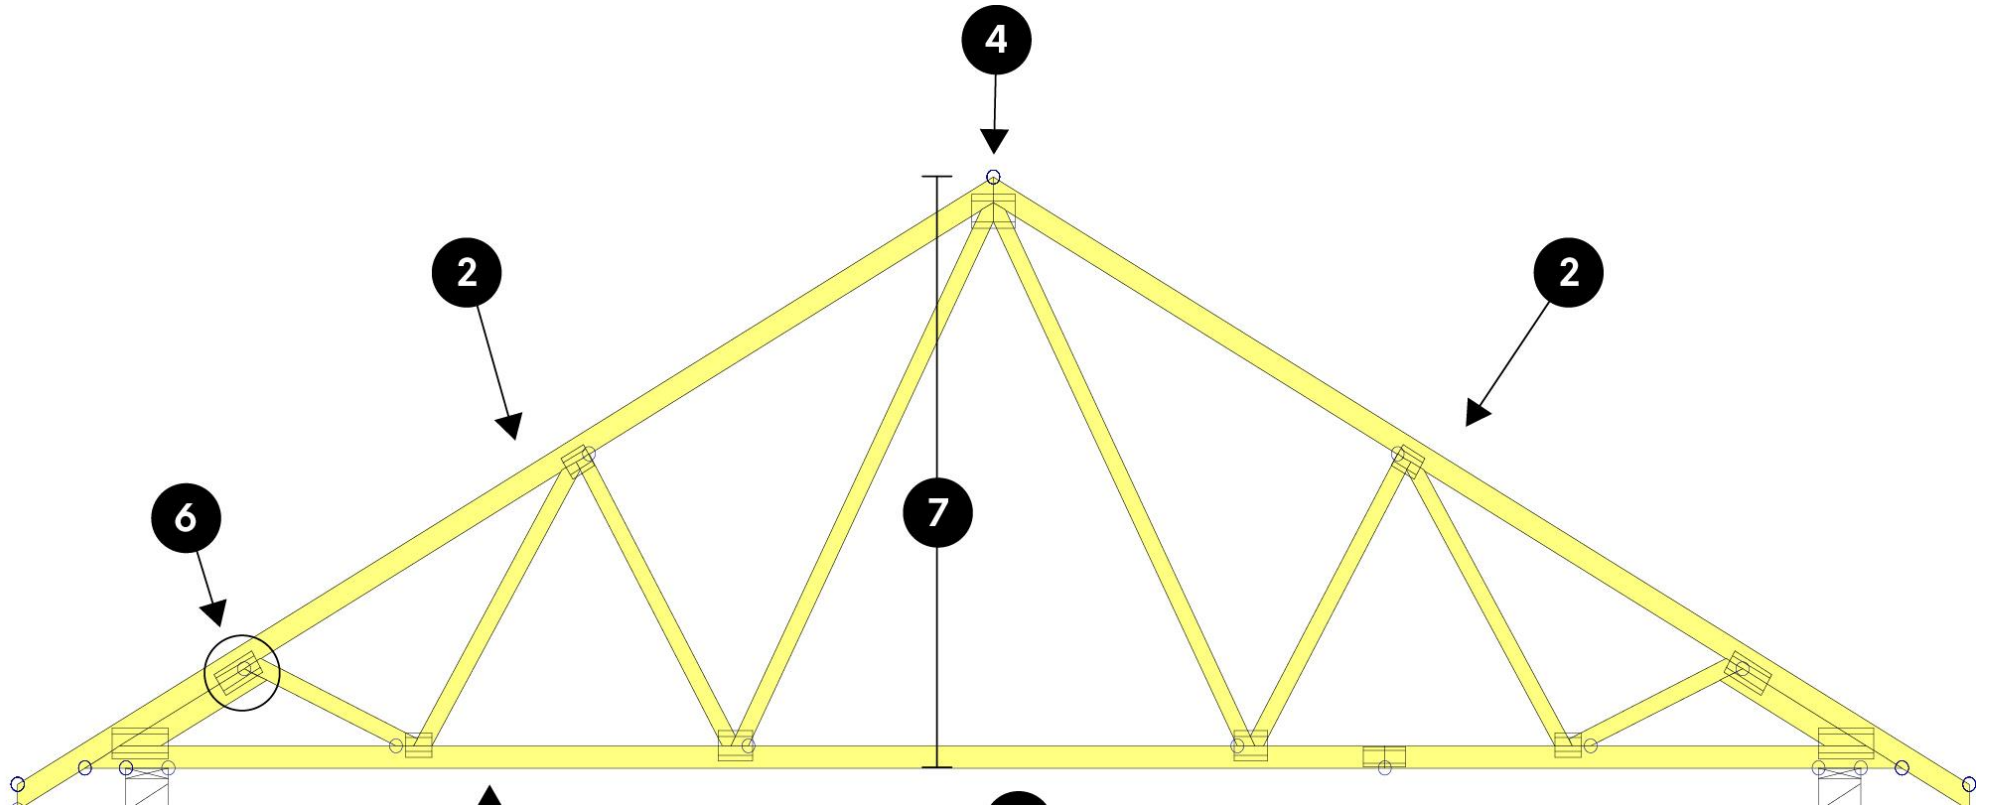

Truss – Assumptions

There are four main assumptions made in the analysis of truss

- 1 Truss members are connected together at their ends only.
- 2 Truss are connected together by frictionless pins.
- 3 The truss structure is loaded only at the joints.
- 4 The weights of the members may be neglected.

Truss examples












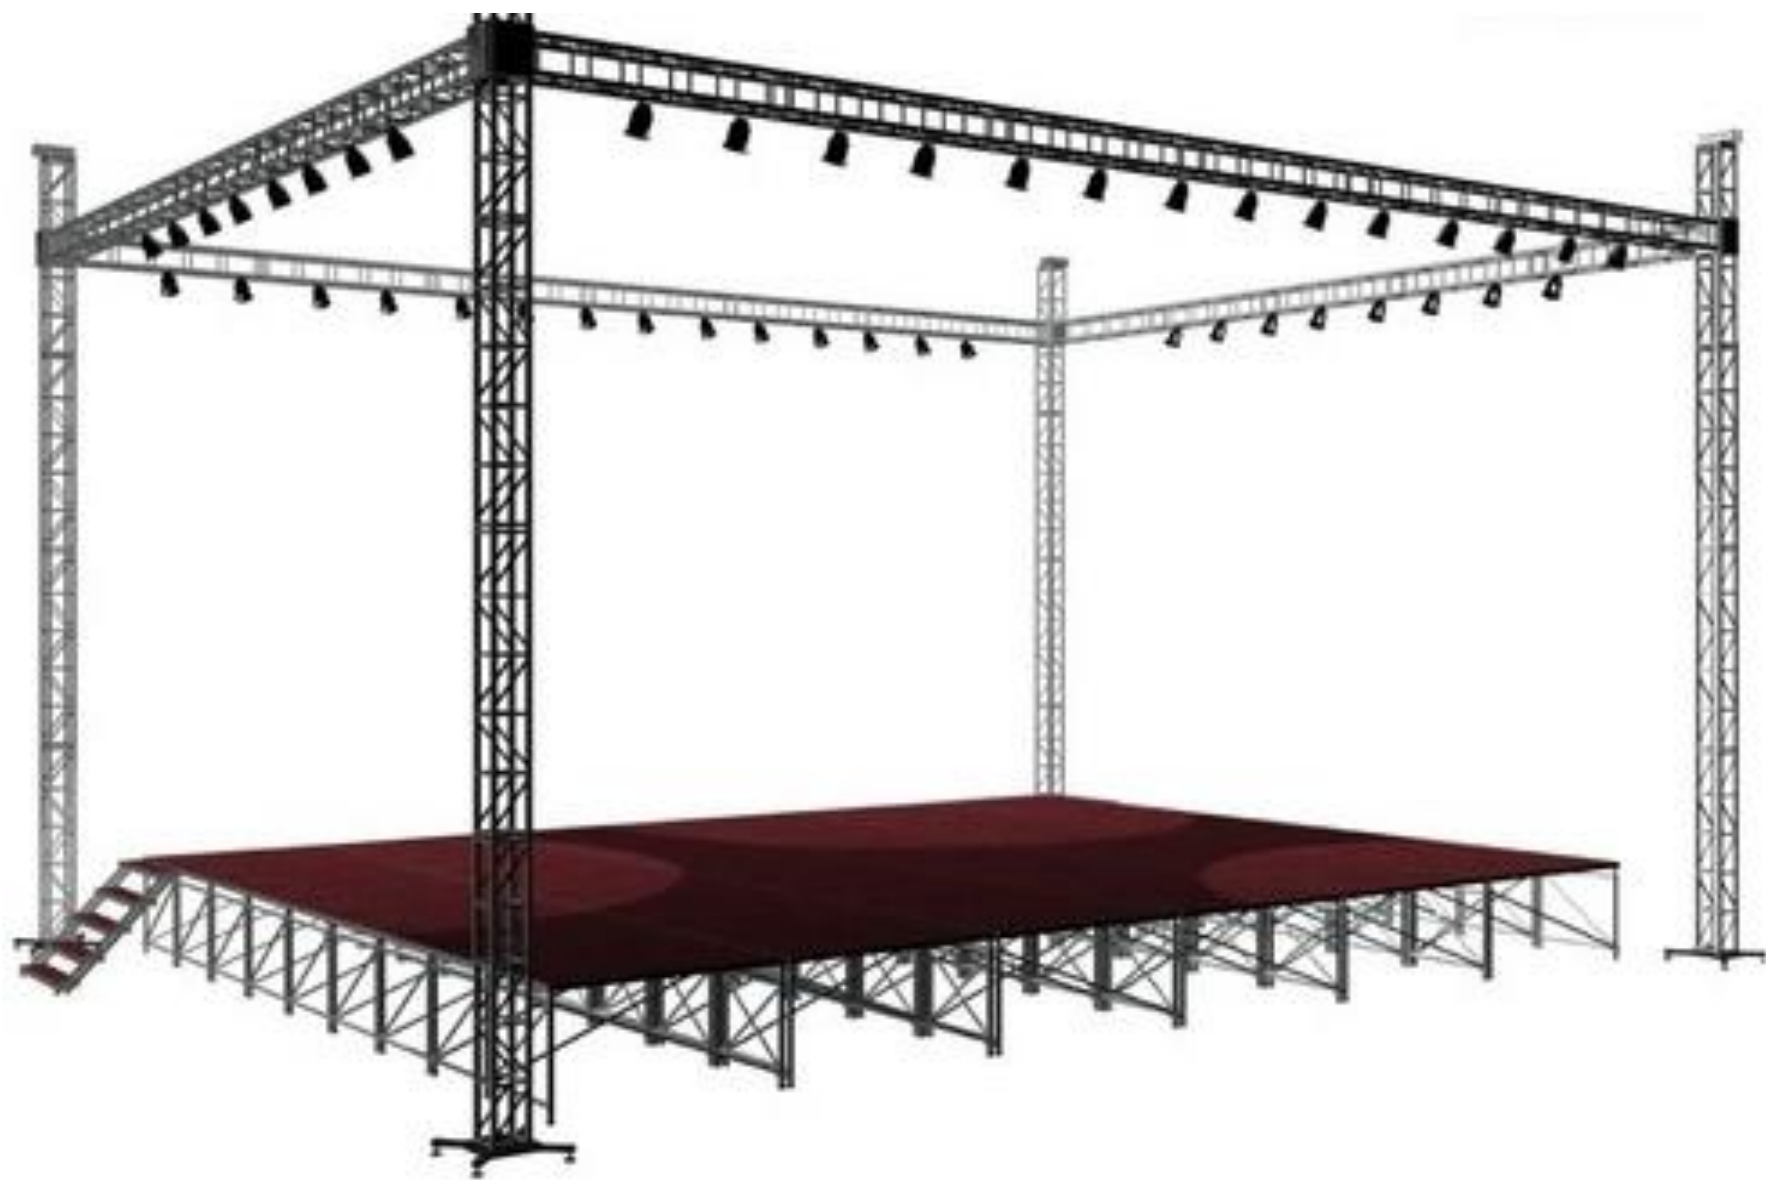




Method of Joints - Truss

The method of joints uses the summation of forces at a joint to solve the force in the members. It does not use the moment equilibrium equation to solve the problem. In a two dimensional set of equations,

$$\sum F_x = 0 \quad \sum F_y = 0$$


In three dimensions,

$$\sum F_z = 0$$

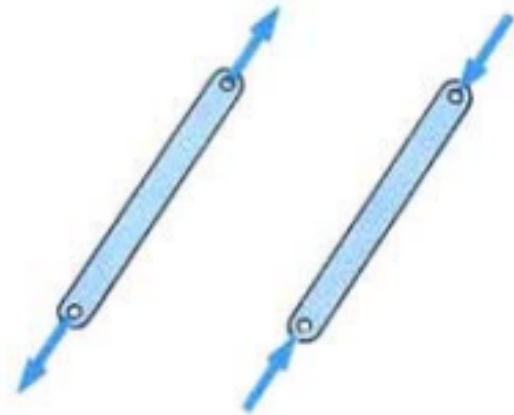


Determine the force in each member of the simple equilateral truss.

Ans. $AB = 736 \text{ N T}$, $AC = 368 \text{ N T}$, $BC = 736 \text{ N C}$

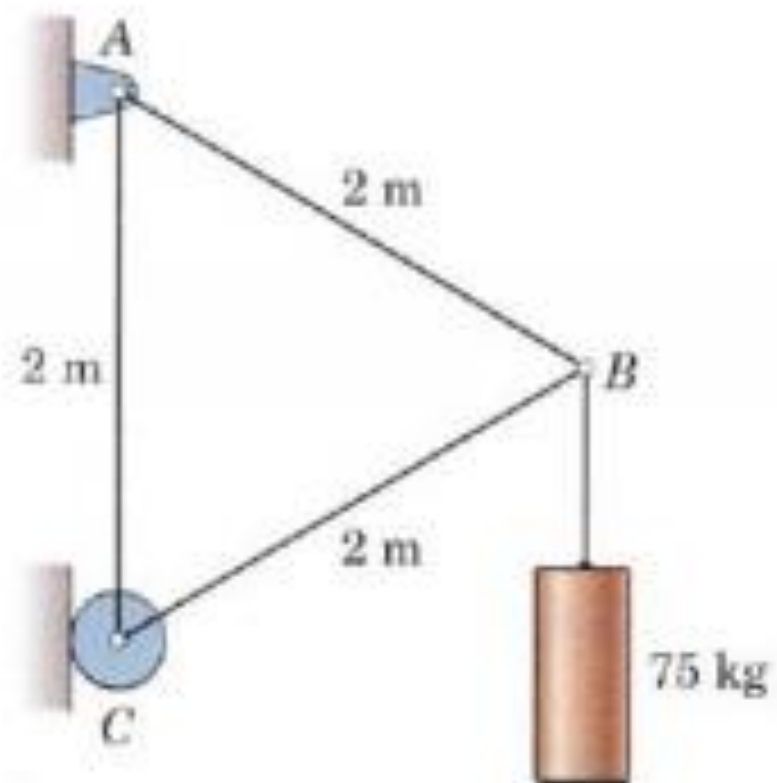

Solution
at joint B //

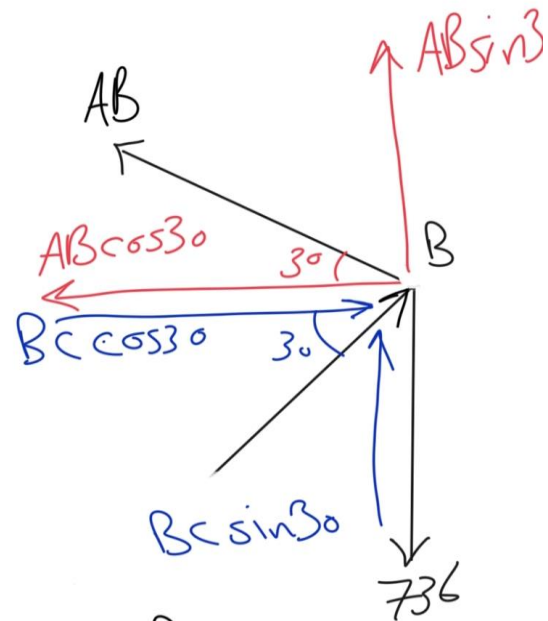

$$\sum F_x = 0 \quad -AB \cos 30 + BC \cos 30 = 0$$
$$AB \cos 30 = BC \cos 30$$

$$\therefore AB = BC \quad \text{--- (1)}$$
$$\sum F_y = 0, \quad AB \sin 30 + BC \sin 30 - 736 = 0 \quad \text{--- (2)}$$

Sub (1) in (2)

$$AB \sin 30 + AB \sin 30 = 736$$

$$2AB \sin 30 = 736$$

$$AB = \frac{736}{2 \times \sin 30}$$

$$\therefore AB = BC = 736 \text{ N.}$$

at joint C //


$$\sum F_y = 0,$$

$$736 \cos 60 - A_c = 0$$


$$A_c = 736 \cos 60$$

$$A_c = 736 \times \frac{1}{2}$$

$$= 368 \text{ N}$$

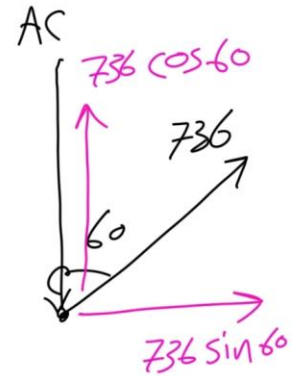


4/4 Calculate the forces in members BE and BD of the loaded truss.

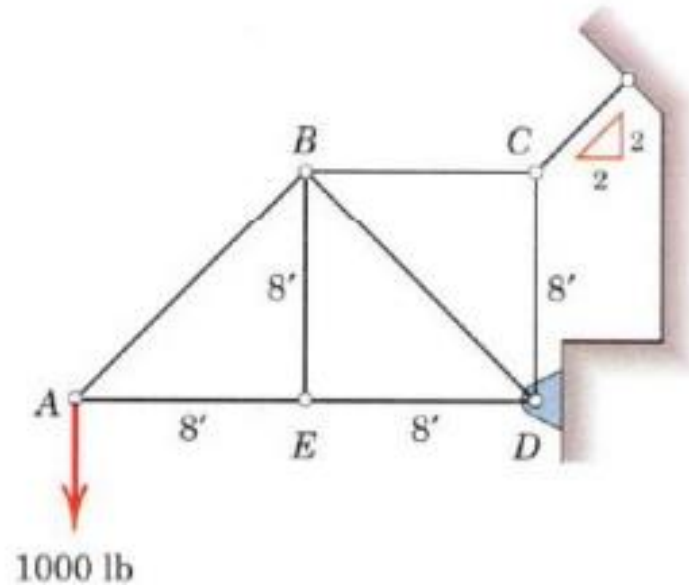

4/4

Joint A:




$$\Sigma F_y = 0: AB \sin 45^\circ - 1000 = 0$$

$$AB = 1414 \text{ lb T}$$

$$\Sigma F_x = 0: 1414 \cos 45^\circ - AE = 0$$


$$AE = 1000 \text{ lb C}$$

Joint E:



$$\Sigma F_y = 0: \underline{BE = 0}$$

Joint B:



$$\Sigma F_x = 0: BC \cos 45^\circ - 1414 = 0$$

$$BC = 2000 \text{ lb T}$$

$$\Sigma F_y = 0: BD - 2000 \cos 45^\circ = 0$$

$$\underline{BD = 1414 \text{ lb C}}$$


4/7 Determine the force in each member of the loaded truss. Make use of the symmetry of the truss and of the loading.

Ans. $AB = DE = 96.0 \text{ kN C}$

$AH = EF = 75 \text{ kN T}$, $BC = CD = 75 \text{ kN C}$


$BH = CG = DF = 60 \text{ kN T}$

$CH = CF = 48.0 \text{ kN C}$, $GH = FG = 112.5 \text{ kN T}$

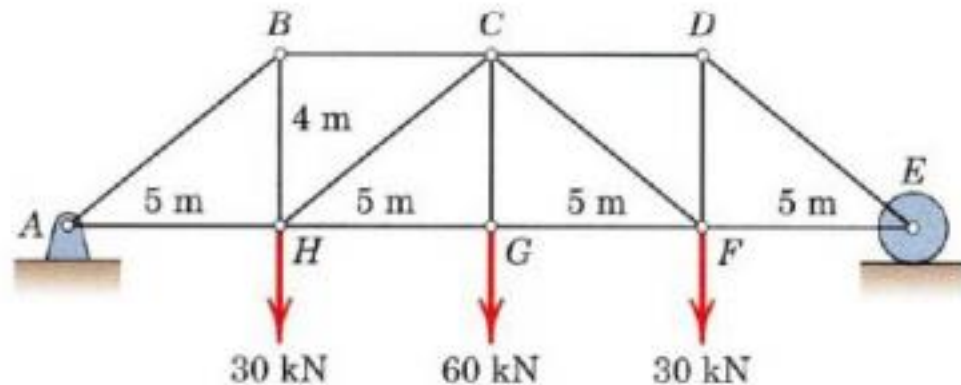

4/7 | As a whole: $\sum F_x = 0 \Rightarrow A_x = 0$

(Dim. in m) $\begin{matrix} y \\ \text{---} \\ x \end{matrix}$ $A_y = E = 60 \text{ kN}$ by

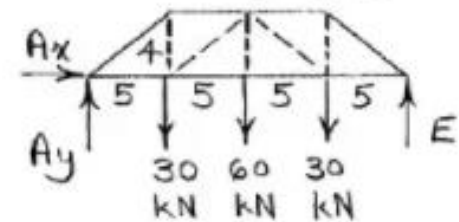

$\sum F_y = 0$ and symmetry.

Joint A: $(\theta = \tan^{-1}(\frac{4}{5}) = 38.7^\circ)$

$$\begin{cases} \sum F_y = 0: 60 - AB \sin \theta = 0, \underline{AB = 96.0 \text{ kN C}} \\ \sum F_x = 0: AH - 96.0 \cos \theta = 0, \underline{AH = 75 \text{ kN T}} \end{cases}$$

$$\begin{cases} \sum F_x = 0: -BC + 96.0 \sin 51.3^\circ = 0, \underline{BC = 75 \text{ kN C}} \\ \sum F_y = 0: -BH + 96.0 \cos 51.3^\circ = 0, \underline{BH = 60 \text{ kN T}} \end{cases}$$

$$\begin{cases} \sum F_y = 0: -CH \sin \theta + 30 = 0, \underline{CH = 48.0 \text{ kN C}} \\ \sum F_x = 0: -48.0 \cos \theta + GH - 75 = 0 \\ \underline{GH = 112.5 \text{ kN T}} \end{cases}$$

$\sum F_y = 0 \Rightarrow \underline{CG = 60 \text{ kN T}}$

By symmetry:
 $FG = 112.5 \text{ kN T}$, $CF = 48.0 \text{ kN C}$
 $CD = 75 \text{ kN C}$, $DF = 60 \text{ kN T}$
 $EF = 75 \text{ kN T}$, $DE = 96.0 \text{ kN C}$