

## Chapter Two

### Pressure and Its Measurement

Dr. Abdulkareem Abdulwahab

#### 2.1/ Fluid pressure at a point:

Consider a small area  $dA$  in large mass of fluid. If the fluid is static, then the force exerted by fluid on the area  $dA$  will always be perpendicular to the surface  $dA$ . Let  $dF$  is the force acting on the area  $dA$  in the normal direction.

Then the ratio of  $\frac{dF}{dA}$  is known as the pressure (  $P$  ). Hence mathematically the pressure at a point in a fluid at rest (static) is:

$$P = \frac{dF}{dA}$$

If the force ( $F$ ) is uniformly distributed over the area ( $A$ ), the pressure at any point is given by:

$$P = \frac{F}{A} \quad ( 2.1 )$$

The unit of pressure are (1)  $\text{kgf} / \text{cm}^2$  (in MKS) (meter – kilogram – second)

(2)  $\text{Newton} / \text{m}^2$  ( $\text{N} / \text{m}^2$ ) (in SI unit).  $\text{N} / \text{m}^2$  is known as Pascal ( $1 \text{ bar} = 100 \text{ kpa} = 10^5 \text{ Pascal}$ )

#### 2.2 / Pascal Law:

It states that the pressure or intensity of pressure at a point in a static fluid is equal in all directions. This is proved as:

The fluid element is of very small directions, i.e., ( $dx$ ,  $dy$  and  $ds$ ).




Fig. (2.1) Forces on a fluid element.

Consider an arbitrary fluid element of wedge shape in a fluid mass at rest, as shown in Fig. (2.1). Let the width of the element perpendicular to the plane of

paper is unity and  $P_x$ ,  $P_y$  and  $P_z$  are the pressure acting on the face AB, AC and BC respectively. Let angle ABC is  $\Theta$ . Then the forces acting on the element are:

1. Pressure force normal to the surfaces.
2. Weight of the element in the vertical direction.

Force on the face AB =  $P_x \times \text{area of face AB}$

$$= P_x \times dy \times 1$$

Force on the face AC =  $P_y \times dx \times 1$

Force on the face BC =  $P_z \times ds \times 1$

Weight of element = mass of element  $\times g$

$$= (\text{volume} \times \rho) \times g = \left( \frac{AB \times AC}{2} \times 1 \right) \times \rho \times g$$

$$\sum F_x = 0$$

$$P_x \times dy \times 1 - P_z (ds \times 1) \sin (90 - \Theta) = 0$$

$$P_x \times dy - P_z \times ds \times \cos \Theta = 0$$

But, from Fig. (2.1),  $ds \cos \Theta = AB = dy$

$$P_x \times dy - P_z \times dy = 0$$

$$P_x = P_z$$

Similarly,  $\sum F_y = 0$

$$P_y \times dx \times 1 - P_z \times ds \times 1 \times \cos (90 - \Theta) - \frac{dx \times dy}{2} \times 1 \times \rho \times g = 0$$

$$P_y \times dx - P_z ds \sin \Theta - \frac{dx \times dy}{2} \times \rho \times g = 0$$

But,  $ds \sin \Theta = dx$ , and the element has very small, therefore the weight is negligible (third term), therefore,

$$P_y = P_z$$

Therefore,  $P_x = P_y = P_z$  (2.2)

This equation shows that the pressure at any point in x, y and z direction is equal.

### 2.3 / Pressure variation in a fluid at rest ( fluid static ) :

The pressure at any point in a fluid at rest is obtained by the hydrostatic law which states that the rate of increase of pressure in a vertically downward direction must be equal to the specific weight (weight density) of the fluid at the point. This is proved as:

Consider a small fluid element as shown in Fig. (2.2).

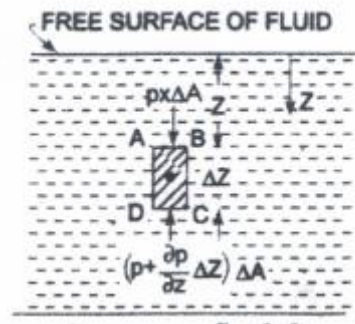


Fig. (2.2) Forces on a fluid element

Let,  $\Delta A$  - cross – section area of element.

$\Delta Z$  - Height of fluid element.

$P$  - pressure on face AB.

$Z$  – distance of fluid element from free surface.

The forces acting on the fluid element are:

1. Pressure force on AB =  $p \times \Delta A$  (acting perpendicular to face AB in the downward direction).
2. Pressure force on CD =  $(p + \frac{\partial p}{\partial z} \Delta Z) \times \Delta A$  ( acting perpendicular to face CD vertically upward direction ).
3. Weight of fluid element =  $\gamma \times \text{volume} = \rho g (\Delta A \times \Delta Z)$ .
4. Pressure forces on surface BC and AD are equal and opposite. For equilibrium of fluid element, we have

$$p\Delta A - (p + \frac{\partial p}{\partial z} \Delta Z) \Delta A + \rho g (\Delta A \times \Delta Z) = 0$$

$$p\Delta A - p\Delta A - \frac{\partial p}{\partial z} \Delta Z \Delta A + \rho g \times \Delta A \times \Delta Z = 0$$

$$- \frac{\partial p}{\partial z} \Delta Z \Delta A + \rho g \times \Delta A \Delta Z = 0$$

$$\frac{\partial p}{\partial z} \Delta Z \Delta A = \rho g \times \Delta A \Delta Z$$

$$\frac{\partial P}{\partial Z} = \gamma$$

$$\frac{dP}{dZ} = \gamma \quad , \quad d p = \gamma dz \quad , \quad \int d p = \gamma \int dz$$

$$P = \gamma Z \quad (2.3)$$

Equation (2.3) states that the rate of increase of pressure in vertical direction is equal to weight density ( $\gamma$ ) of the fluid at that point. This is Hydrostatic Law. ( $Z$  is called pressure head).

### 2.4 / Absolute, Gauge, Atmospheric, And Vacuum Pressures

The pressure on the fluid is measured in two difference systems. In one system, it is measured above the absolute zero or complete vacuum and it is called the absolute pressure and in other system, pressure is measured above the atmospheric pressure and is called gauge pressure.

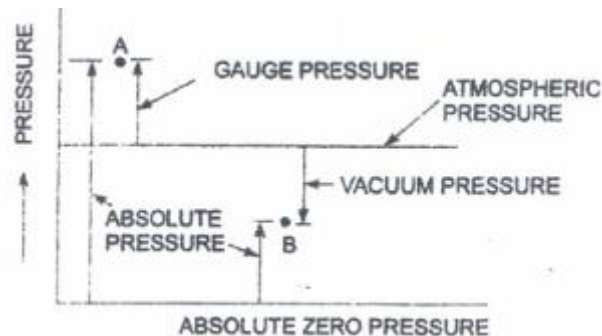


Fig. (2.3) Relationship between pressure.

The relationship between the absolute pressure, gauge pressure and vacuum pressure are shown in Fig. (2.3).

Mathematically:

$$P_{\text{abs.}} = P_{\text{atm.}} \pm P_{\text{gauge}} \quad (2.4)$$

$$P_{A(\text{abs})} = P_{\text{atm.}} + P_{\text{gauge}}$$

$$P_{B(\text{abs})} = P_{\text{atm.}} - P_{\text{gauge(vacuum)}}$$

The values of atmospheric pressure at sea level at 15°C:

$$P_{\text{atm.}} = 101.3 \text{ KN/m}^2 \text{ (kpa)}, P_{\text{atm.}} = 10^5 \text{ N/m}^2 \text{ (Pascal)}$$

$P_{\text{atm.}} = 76 \text{ cm Hg.}$   $P_{\text{atm.}} = 10 \text{ m (water),}$   $P_{\text{atm.}} = 14.7 \text{ psi}$

$P_{\text{atm.}} = 14.7 \text{ psi.}$   $P_{\text{atm.}} = 1\text{bar.}$

## 2.5/ Measurement of pressure:

The pressure of a fluid is measured by the following devices:

1. Manometers.
2. Mechanical Gauges.

### 2.5.1/ Manometers:

Manometers are defined as the devices used for measuring the pressure at a point in a fluid by balancing the column of fluid by the same or another column of the fluid. They are classified as:

( 1 ) simple manometers , ( 2 ) Differential manometers

### 2.5.2 / Simple Manometers:

A simple manometer consists of a glass tube having one of its ends connected to a point where pressure is to be measured and other end remains open to atmosphere. Common types of simple manometers are :

1. Piezometer. 2. U – tube Manometer. , 3. Single Column Manometer.

#### 1. Piezometer:

It is simple form of manometer, used for measuring gauge pressures, as shown in Fig. (2.4)

$$P_A = \rho g h = \gamma h \quad \text{N/m}^2 \quad (\text{Pascal}) \quad (2.5)$$




Fig. (2.4) Piezometer.

#### 2. U– tube Manometer:

It consists of glass tube bent in U- shape, one end of which is connected to a point at which pressure is to be measured and other end remains open to