




DESIGN CHARTS OF ROAD PAVEMENT



**FLEXIBLE
PAVEMENT
(AASHTO)**

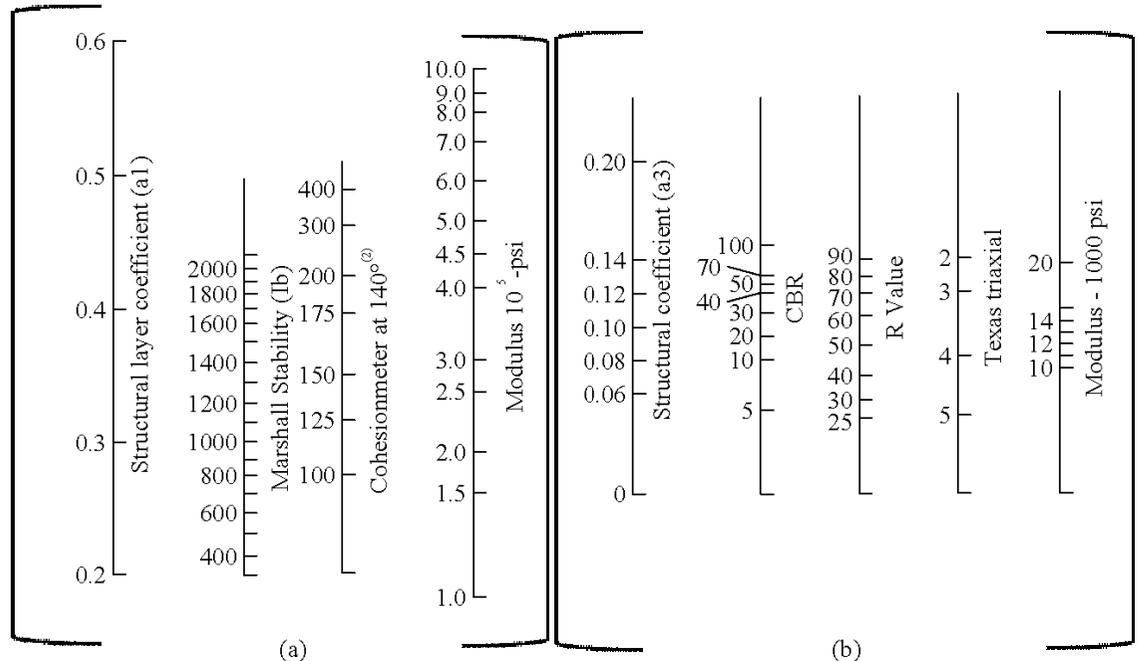


Variation in a_1 with surface course strength parameters

Variation in a_3 for granular subbase and subbase strength parameters

a_1


a_3

(Yoder, Fig. 15.3, P.515)

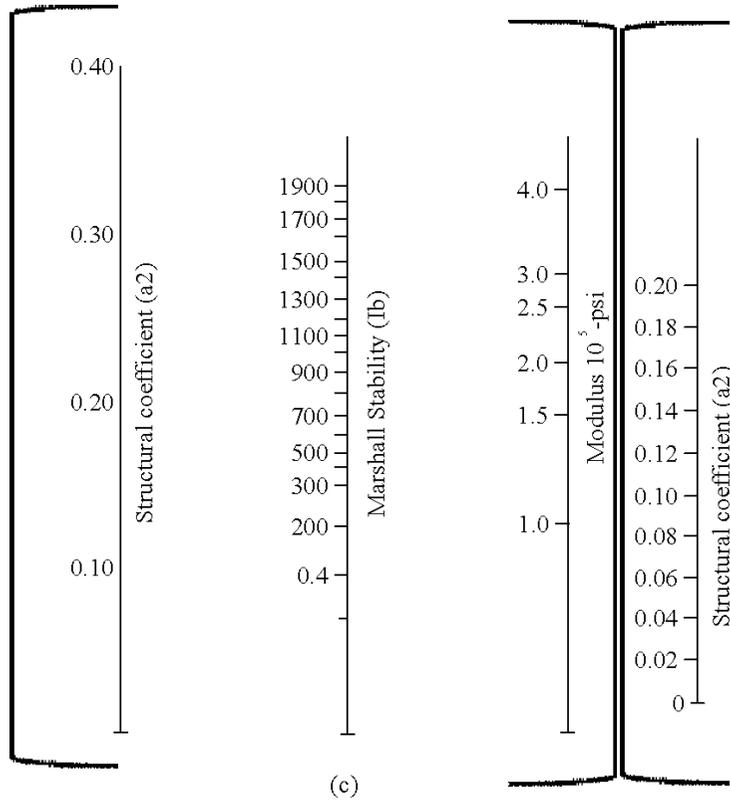


Variation in (a₂) for bituminous-treated bases with strength parameters

a₂
Asphaltic Layer

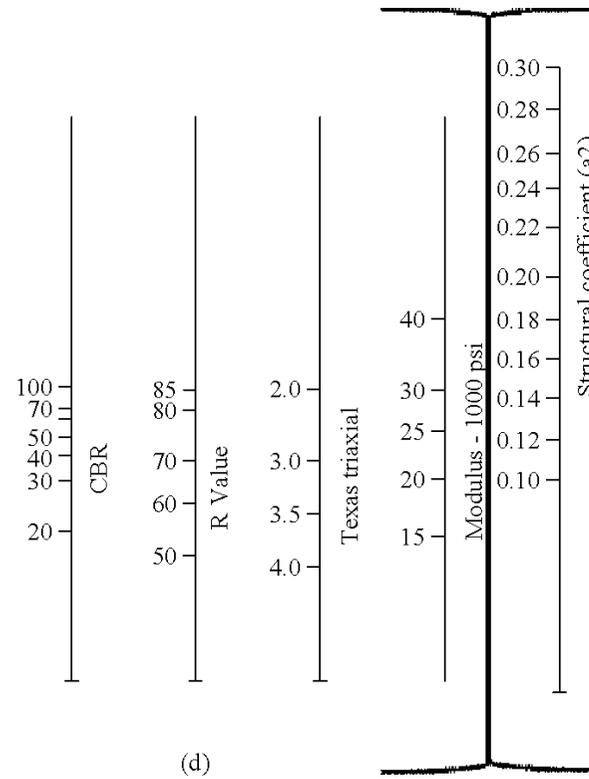

Variation in granular coefficient (a₂) with base strength parameters

a₂
Crushed Stone Layer

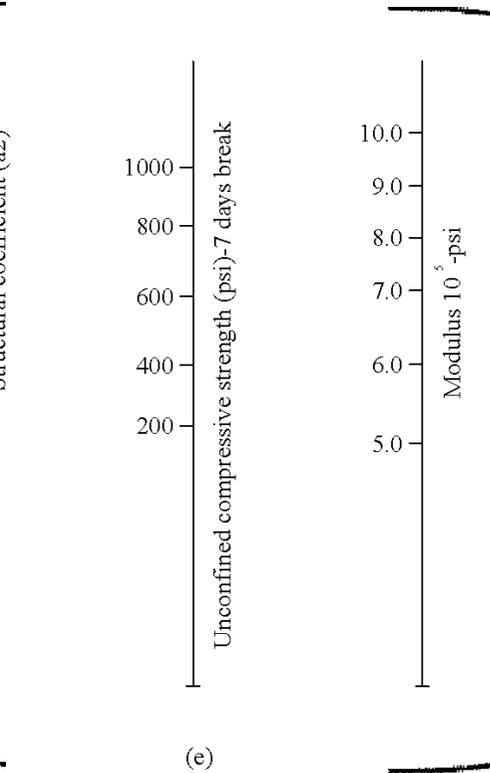

Variation in (a₂) for cement-treated bases with base strength parameters


a₂
Cement Treated Layer

(Yoder, Fig. 15.3, P.515)

Regional Factor


(Yoder, Table 15.1, P.510)

Condition	R value
Roadbed materials frozen to depth of 5in or more	0.2 – 1.0
Roadbed materials dry, summer and fall	0.3 – 1.5
Roadbed materials wet, spring thaw	4.0 – 5.0

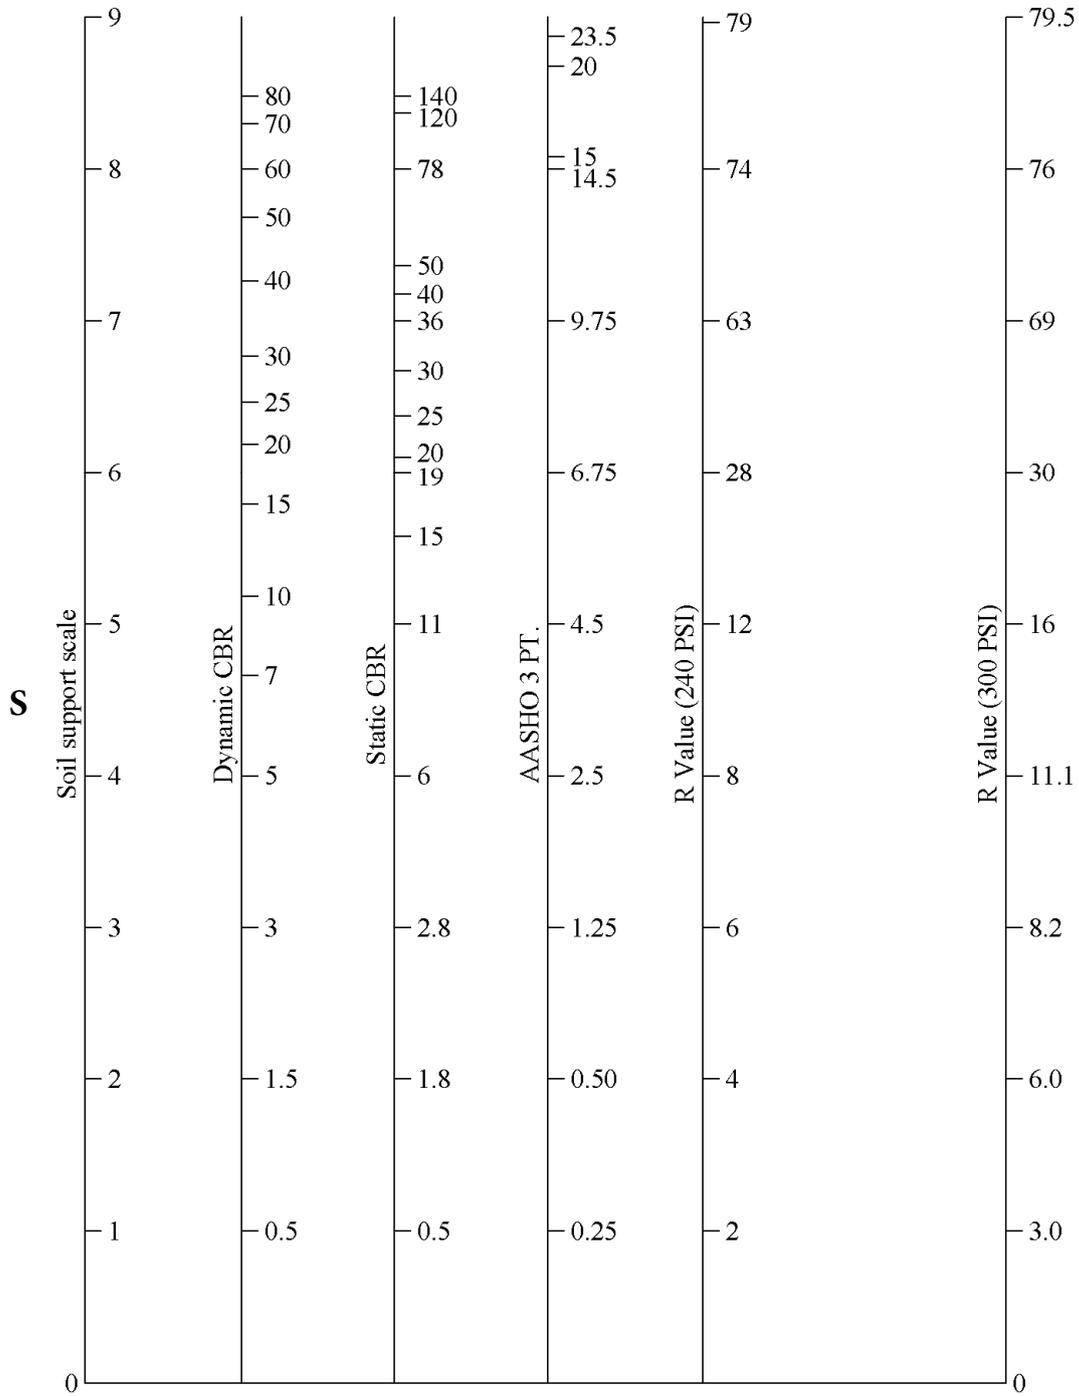


Soil support value correlations

(Yoder, Fig. 15.5, P.516)

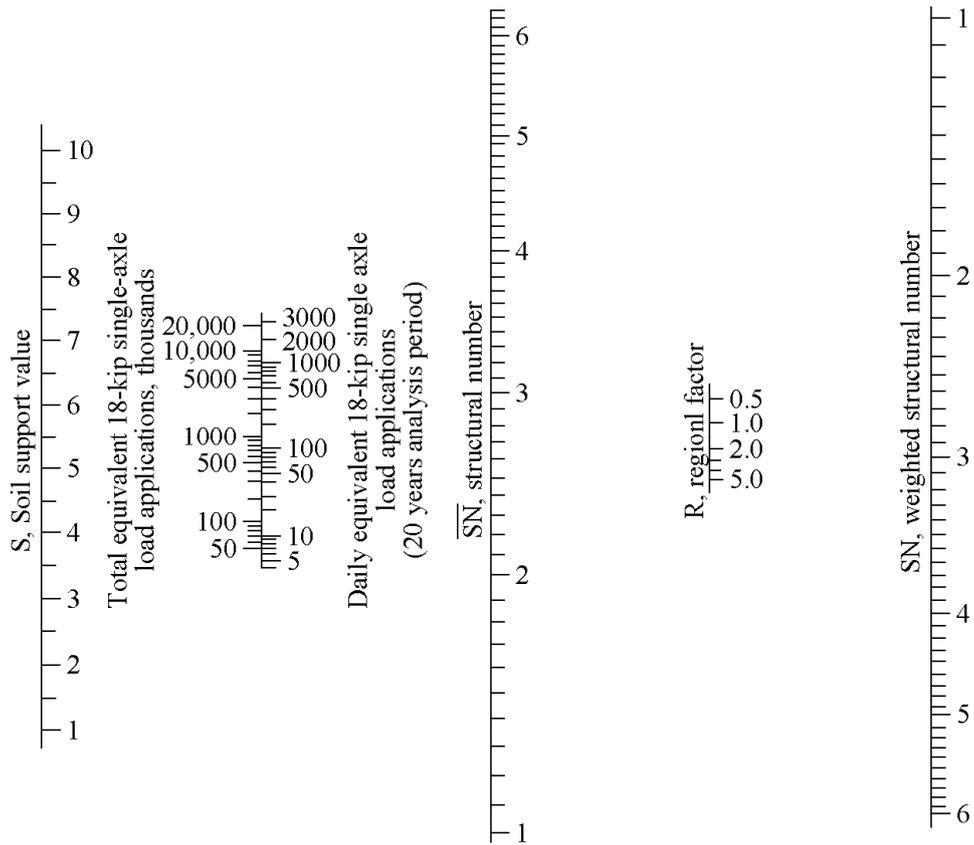

Design chart for flexible pavements, $p_t = 2.0$

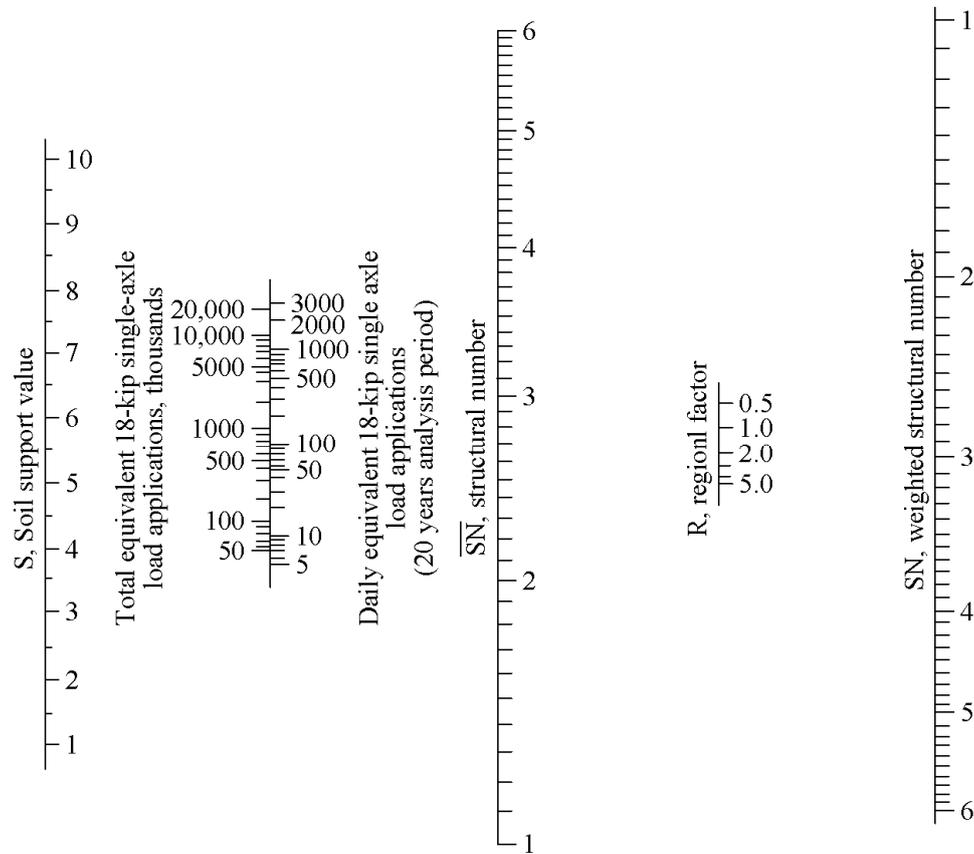

Design chart for flexible pavements, $p_t = 2.5$

(Yoder, Fig. 15.1, P.509)

Table 4.9 AASHO Equivalence Factors – Flexible Pavement

(Yoder, P.164)

Single Axle, $\rho_t = 2.0$

Axle Load (kips)	Structural Number, SN					
	1	2	3	4	5	6
2	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002
4	0.002	0.003	0.002	0.002	0.002	0.002
6	0.01	0.01	0.01	0.01	0.01	0.01
8	0.03	0.04	0.04	0.03	0.03	0.03
10	0.08	0.08	0.09	0.08	0.08	0.08
12	0.16	0.18	0.19	0.18	0.17	0.17
14	0.32	0.34	0.35	0.35	0.34	0.33
16	0.59	0.60	0.61	0.61	0.60	0.60
18	1.00	1.00	1.00	1.00	1.00	1.00
20	1.61	1.59	1.56	1.55	1.57	1.60
22	2.49	2.44	2.35	2.31	2.35	2.41
24	3.71	3.62	3.43	3.33	3.40	3.51
26	5.36	5.21	4.88	4.68	4.77	4.96
28	7.54	7.31	6.78	6.42	6.52	6.83
30	10.38	10.03	9.24	8.65	8.73	9.17
32	14.00	13.51	12.37	11.46	11.48	12.17
34	18.55	17.87	16.30	14.97	14.87	15.63
36	24.20	23.30	21.16	19.28	19.02	19.93
38	31.14	29.95	27.12	24.55	24.03	25.10
40	39.57	38.02	34.34	30.92	30.04	31.25

Tandem Axle, $\rho_t = 2.0$

Axle Load (kips)	Structural Number, SN					
	1	2	3	4	5	6
10	0.01	0.01	0.01	0.01	0.01	0.01
12	0.01	0.02	0.02	0.01	0.01	0.01
14	0.02	0.03	0.03	0.03	0.02	0.02
16	0.04	0.05	0.05	0.05	0.04	0.04
18	0.07	0.08	0.08	0.08	0.07	0.07
20	0.10	0.12	0.12	0.12	0.11	0.10
22	0.16	0.17	0.18	0.17	0.16	0.16
24	0.23	0.24	0.26	0.25	0.24	0.23
26	0.32	0.34	0.36	0.35	0.34	0.33
28	0.45	0.46	0.49	0.48	0.47	0.46
30	0.61	0.62	0.65	0.64	0.63	0.62
32	0.81	0.82	0.84	0.84	0.83	0.82
34	1.06	1.07	1.08	1.08	1.08	1.07
36	1.38	1.38	1.38	1.38	1.38	1.38
38	1.76	1.75	1.73	1.72	1.73	1.74
40	2.22	2.19	2.15	2.13	2.16	2.18
42	2.77	2.73	2.64	2.62	2.66	2.70
44	3.42	3.36	3.23	3.18	3.24	3.31
46	4.20	4.11	3.92	3.83	3.91	4.02
48	5.10	4.98	4.72	4.58	4.68	4.83

Table 4.9 (Continued)

(Yoder, P.165)

Single Axle, $\rho_t = 2.5$

Axle Load (kips)	Structural Number, SN					
	1	2	3	4	5	6
2	0.0004	0.0004	0.0003	0.0002	0.0002	0.0002
4	0.003	0.004	0.004	0.004	0.003	0.002
6	0.01	0.02	0.02	0.01	0.01	0.01
8	0.03	0.05	0.05	0.04	0.03	0.03
10	0.08	0.10	0.12	0.10	0.09	0.08
12	0.17	0.20	0.23	0.21	0.19	0.18
14	0.33	0.36	0.40	0.39	0.36	0.34
16	0.59	0.61	0.65	0.65	0.62	0.61
18	1.00	1.00	1.00	1.00	1.00	1.00
20	2.61	1.57	1.49	1.47	1.51	1.55
22	2.48	2.38	2.17	2.09	2.18	2.30
24	3.69	3.49	3.09	2.89	3.03	3.27
26	5.33	4.99	4.31	3.91	4.09	4.48
28	7.49	6.98	5.90	5.21	5.39	5.98
30	10.31	9.55	7.94	6.83	6.97	7.79
32	13.90	12.82	10.52	8.85	8.88	9.95
34	18.41	16.94	13.74	11.34	11.18	12.51
36	24.02	22.04	17.73	14.38	13.93	15.50
38	30.90	28.30	22.61	18.06	17.20	18.98
40	39.26	35.89	28.51	22.50	21.08	23.04

Tandem Axle, $\rho_t = 2.5$

Axle Load (kips)	Structural Number, SN					
	1	2	3	4	5	6
10	0.01	0.01	0.01	0.01	0.01	0.01
12	0.02	0.02	0.02	0.02	0.01	0.01
14	0.03	0.04	0.04	0.03	0.03	0.02
16	0.04	0.07	0.07	0.06	0.05	0.04
18	0.07	0.10	0.11	0.09	0.08	0.07
20	0.11	0.14	0.16	0.14	0.12	0.11
22	0.16	0.20	0.23	0.21	0.18	0.17
24	0.23	0.27	0.31	0.29	0.26	0.24
26	0.33	0.37	0.42	0.40	0.36	0.34
28	0.45	0.49	0.55	0.53	0.50	0.47
30	0.61	0.65	0.70	0.70	0.66	0.63
32	0.81	0.84	0.89	0.89	0.86	0.83
34	1.06	1.08	1.11	1.11	1.09	1.08
36	1.38	1.38	1.38	1.38	1.38	1.38
38	1.75	1.73	1.69	1.68	1.70	1.73
40	2.21	2.16	2.06	2.03	2.08	2.14
42	2.76	2.67	2.49	2.43	2.51	2.61
44	3.41	3.27	2.99	2.88	3.00	3.16
46	4.18	3.98	3.58	3.40	3.55	3.79
48	5.08	4.80	4.25	3.98	4.17	4.49

**RIGID
PAVEMENT
(PCA)**


Table 17.1. Stress Ratios Allowable Load Repetitions
Yoder, P.603

Stress Ratio S_R	Allowable Repetition N_{all} (Veh.)
0.51	400,000
0.52	300,000
0.53	240,000
0.54	180,000
0.55	130,000
0.56	100,000
0.57	75,000
0.58	57,000
0.59	42,000
0.60	32,000
0.61	24,000
0.62	18,000
0.63	14,000
0.64	11,000
0.65	8,000
0.66	6,000
0.67	4,500
0.68	3,500
0.69	2,500
0.70	2,000
0.71	1,500
0.72	1,100
0.73	850
0.74	650
0.75	490
0.76	360
0.77	270
0.78	210
0.79	160
0.80	120
0.81	90
0.82	70
0.83	50
0.84	40
0.85	30

NOTE:
Unlimited Repetition for $S_R = 0.5$ or less


$$d = (7 - 9) \text{ in}$$

Charts and Tables for Rigid Pavement Thickness Design by PCA Method

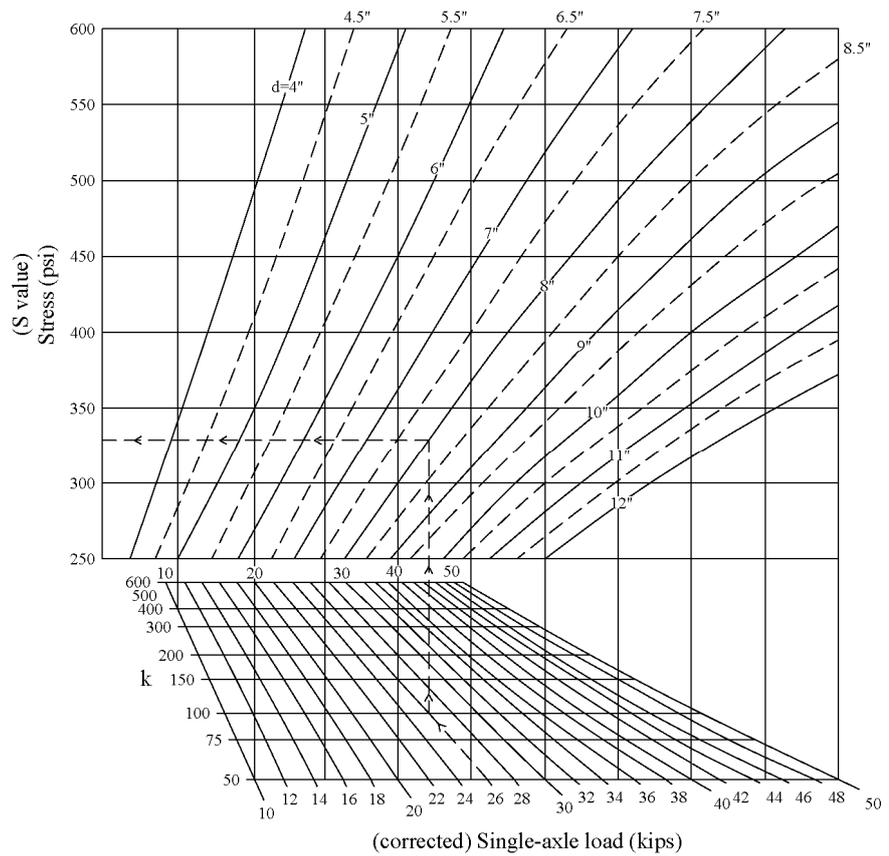

Design chart for single-axle truck loads (From Portland Cement Association)

Figure 17.2, Yoder, P.604

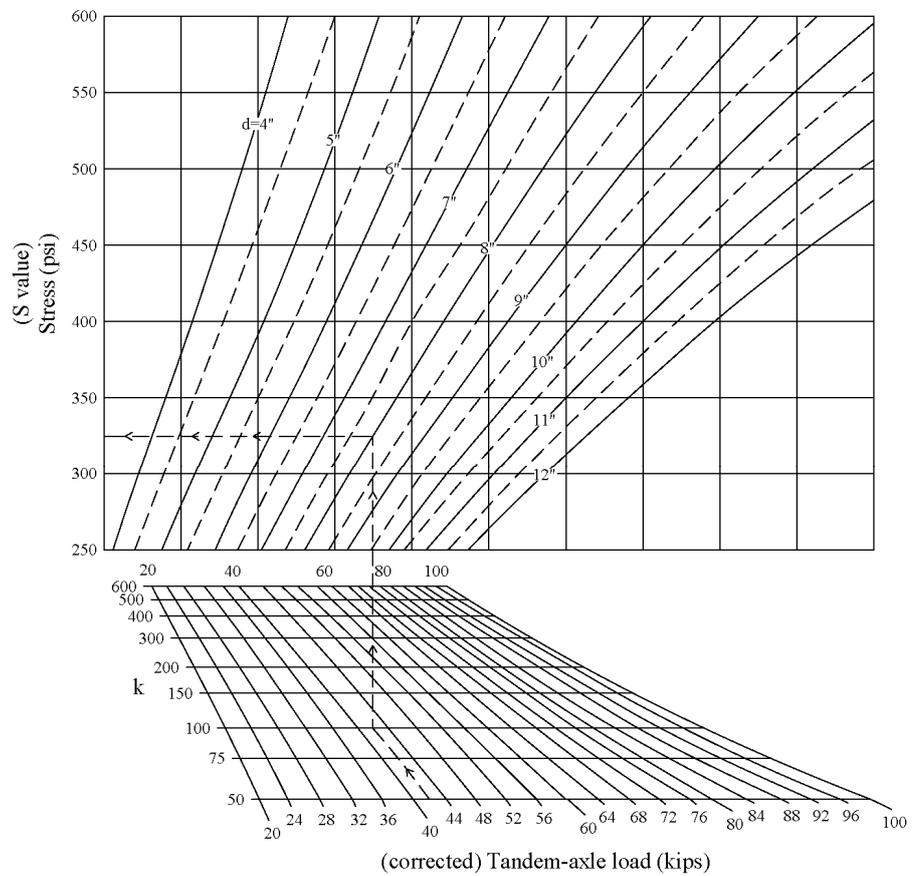

Design chart for tandem-axle truck loads (From Portland Cement Association)

Figure 17.3, Yoder, P.605

**RIGID
PAVEMENT
(AASHTO)**

Table 4.10 AASHO Equivalence Factors – Rigid Pavement

(Yoder, P.166)

Single Axle, $\rho_t = 2.0$

Axle Load (kips)	D – Slab Thickness (in)					
	6	7	8	9	10	11
2	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002
4	0.002	0.002	0.002	0.002	0.002	0.002
6	0.01	0.01	0.01	0.01	0.01	0.01
8	0.03	0.03	0.03	0.03	0.03	0.03
10	0.09	0.08	0.08	0.08	0.08	0.08
12	0.19	0.18	0.18	0.18	0.17	0.17
14	0.35	0.35	0.34	0.34	0.34	0.34
16	0.61	0.61	0.60	0.60	0.60	0.60
18	1.00	1.00	1.00	1.00	1.00	1.00
20	1.55	1.56	1.57	1.58	1.58	1.59
22	2.32	2.32	2.35	2.38	2.40	2.41
24	3.37	3.34	3.40	3.47	3.51	3.53
26	4.76	4.69	4.77	4.88	4.97	5.02
28	6.59	6.44	6.52	6.70	6.85	6.94
30	8.92	8.68	8.74	8.98	9.23	9.39
32	11.87	11.49	11.51	11.82	12.17	12.44
34	15.55	15.00	14.95	15.30	15.78	16.18
36	20.07	19.30	19.16	19.53	20.14	20.71
38	25.56	24.54	24.26	24.63	25.36	26.14
40	32.18	30.85	30.41	30.75	31.58	32.57

Tandem Axle, $\rho_t = 2.0$

Axle Load (kips)	D – Slab Thickness (in)					
	6	7	8	9	10	11
10	0.01	0.01	0.01	0.01	0.01	0.01
12	0.03	0.03	0.03	0.03	0.03	0.03
14	0.05	0.05	0.05	0.05	0.05	0.05
16	0.09	0.08	0.08	0.08	0.08	0.08
18	0.14	0.14	0.13	0.13	0.13	0.13
20	0.22	0.21	0.21	0.20	0.20	0.20
22	0.32	0.31	0.31	0.30	0.30	0.30
24	0.45	0.45	0.44	0.44	0.44	0.44
26	0.63	0.64	0.62	0.62	0.62	0.62
28	0.85	0.85	0.85	0.85	0.85	0.85
30	1.13	1.13	1.14	1.14	1.14	1.14
32	1.48	1.45	1.49	1.50	1.51	1.51
34	1.91	1.90	1.93	1.95	1.96	1.97
36	2.42	2.41	2.45	2.49	2.51	2.52
38	3.04	3.02	3.07	3.13	3.17	3.19
40	3.79	3.74	3.80	3.89	3.95	3.98
42	4.67	4.59	4.66	4.78	4.87	4.93
44	5.72	5.59	5.67	5.82	5.95	6.03
46	6.94	6.76	6.83	7.02	7.20	7.31
48	8.36	8.12	8.17	8.40	8.63	8.79

Table 4.10 (Continued)


(Yoder, P.167)

Single Axle, $\rho_t = 2.5$


Axle Load (kips)	D – Slab Thickness (in)					
	6	7	8	9	10	11
2	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002
4	0.003	0.002	0.002	0.002	0.002	0.002
6	0.01	0.01	0.01	0.01	0.01	0.01
8	0.04	0.04	0.03	0.03	0.03	0.03
10	0.10	0.09	0.08	0.08	0.08	0.08
12	0.20	0.19	0.18	0.18	0.18	0.17
14	0.38	0.36	0.35	0.34	0.34	0.34
16	0.63	0.62	0.61	0.60	0.60	0.60
18	1.00	1.00	1.00	1.00	1.00	1.00
20	1.51	1.52	1.55	1.57	1.58	1.58
22	2.21	2.20	2.28	2.34	2.38	2.40
24	3.16	3.10	3.23	3.36	3.45	3.50
26	4.41	4.26	4.42	4.67	4.85	4.95
28	6.05	5.76	5.92	6.29	6.61	6.81
30	8.16	7.67	7.79	8.28	8.79	9.14
32	10.81	10.06	10.10	10.70	11.43	11.99
34	14.12	13.04	12.94	13.62	14.59	15.43
36	18.20	16.69	16.41	17.12	18.33	19.52
38	23.15	21.14	20.61	21.31	22.74	24.31
40	29.11	26.49	25.65	26.29	27.91	29.90

Tandem Axle, $\rho_t = 2.5$

Axle Load (kips)	D – Slab Thickness (in)					
	6	7	8	9	10	11
10	0.01	0.01	0.01	0.01	0.01	0.01
12	0.03	0.03	0.03	0.03	0.03	0.03
14	0.06	0.05	0.05	0.05	0.05	0.05
16	0.10	0.09	0.08	0.08	0.08	0.08
18	0.16	0.14	0.14	0.13	0.13	0.13
20	0.23	0.22	0.21	0.21	0.20	0.20
22	0.34	0.32	0.31	0.31	0.30	0.30
24	0.48	0.46	0.45	0.44	0.44	0.44
26	0.64	0.64	0.63	0.62	0.62	0.62
28	0.85	0.85	0.85	0.85	0.85	0.85
30	1.11	1.12	1.13	1.14	1.14	1.14
32	1.43	1.44	1.47	1.49	1.50	1.51
34	1.82	1.82	1.87	1.92	1.95	1.96
36	2.29	2.27	2.35	2.43	2.48	2.51
38	2.85	2.80	2.91	3.04	3.12	3.16
40	3.52	3.42	3.55	3.74	3.87	3.94
42	4.32	4.16	4.30	4.55	4.74	4.86
44	5.26	5.01	5.16	5.48	5.75	5.92
46	6.36	6.01	6.14	6.53	6.90	7.14
48	7.64	7.16	7.27	7.73	8.21	8.55

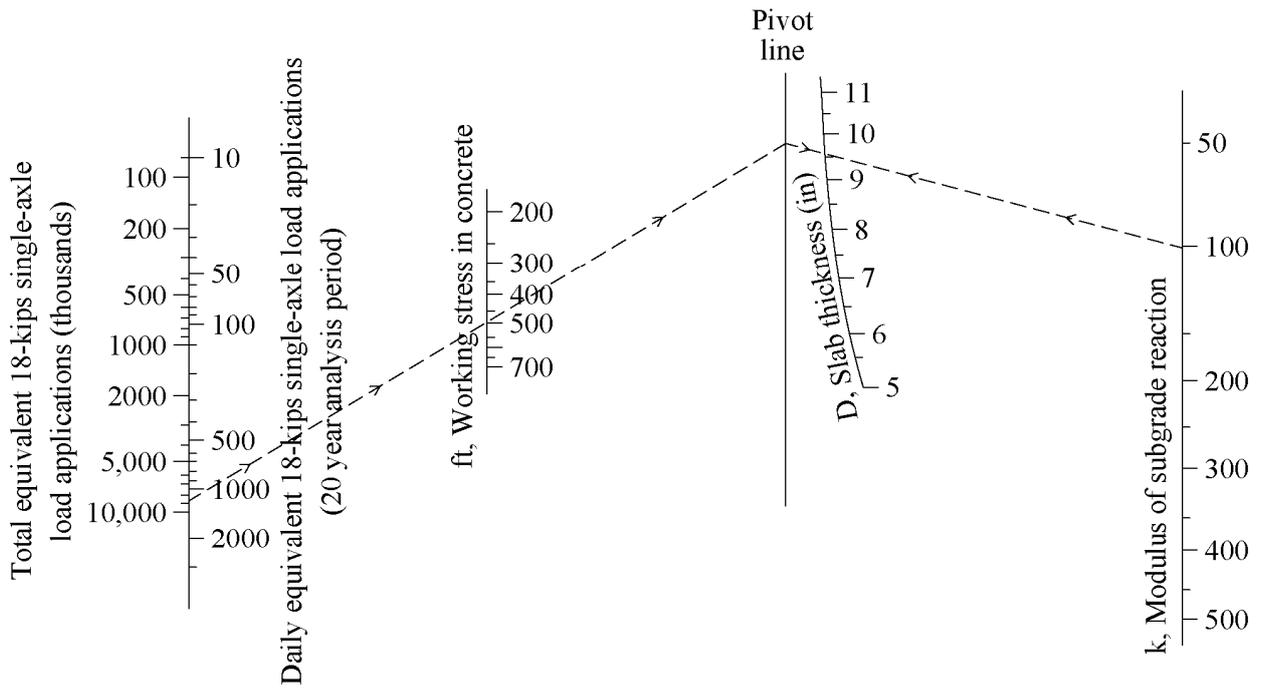

Design chart for rigid pavements, $p_t = 2.0$. (From AASHO Interim Guide)
 Yoder, Figure 17.4, P.608

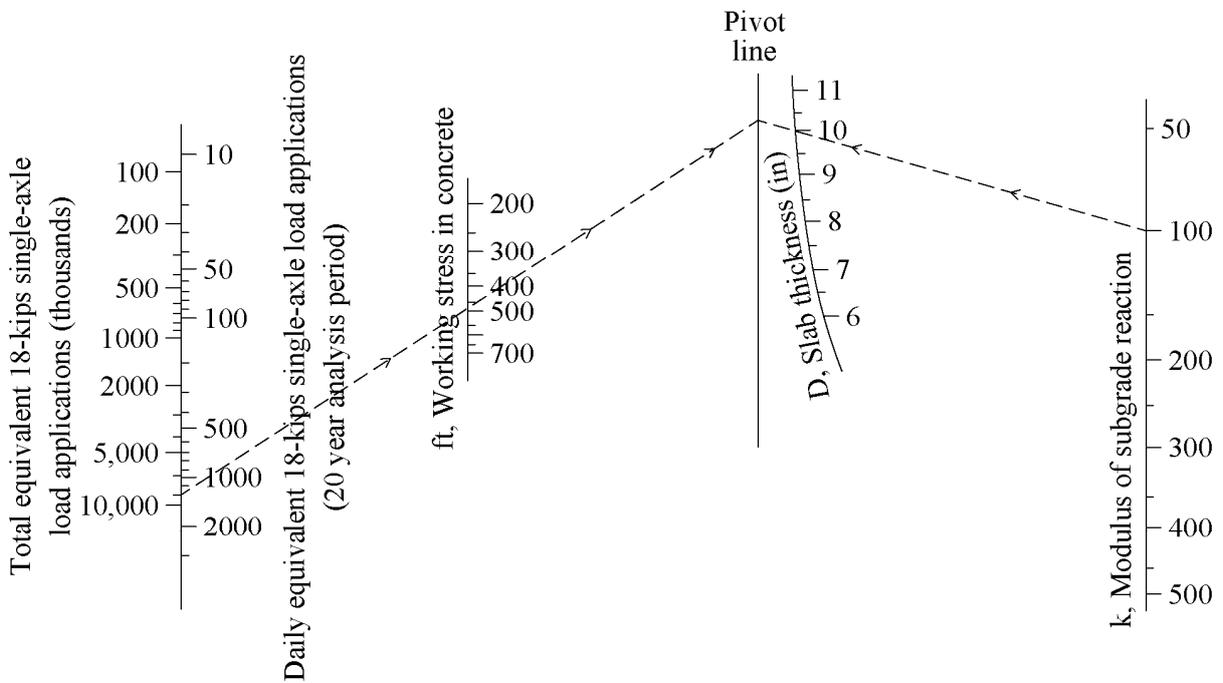

Design chart for rigid pavements, $p_t = 2.5$. (From AASHO Interim Guide)
 Yoder, Figure 17.5, P.608